

FS191M

Compact, Versatile Metal Additive Manufacturing System

▶ www.farsoon-gl.com



COMPACT & VERSATILE SOLUTIONS

The FS191M offers a $\phi 195 \times 220$ mm (6.57L) build cylinder size with a powerful 500W fiber laser, making it ideal for pilot projects and small-batch production. For R&D and high temperature applications, the optional $\phi 80 \times 100$ mm and $\phi 80 \times 90$ mm build platforms reduce material costs and increases flexibility. Users can switch between platforms for validation and production. With a compact 0.88m² footprint, it fits conveniently into office environments for versatile deployment.

COST-EFFECTIVE PERFORMANCE

The FS191M delivers precision and efficiency with key features like a high-precision F-Theta lens, integrated filtration, real-time in-chamber monitoring, innovative recoater design, and advanced control card. Its open parameter strategy allows full customization, making it a flexible choice for various industries.

ADVANCED TECHNOLOGIES FOR R&D

Designed for research-driven applications, the FS191M offers high precision and success rates with unique add-on modules and capabilities like SRS (Support Reduction System), high-resolution melt pool monitoring, powder surface flatness measurement, Beam Shaping Technology, and a high-temperature build plate.

FARSOON FS191M


TECHNICAL DATA	FS191M
External Dimensions (L×W×H)	1100×800×2000 mm (43.3×31.5×78.7 in)
Build Cylinder Size¹ (L×W×H) (Height incl. build plate.)	Φ195×220 mm (Φ7.68×8.66 in) (Optional R&D platform: Φ80×100mm, High-temperature platform: Φ80×90mm)
Effective Build Size (L×W×H) (Height incl. build plate.)	Φ191×220 mm (Φ7.52×8.66 in) (Optional R&D platform: Φ78×100mm, High-temperature platform: Φ78×90mm)
Net Weight	Approx.600 kg (1322.8 lb)
Layer Thickness²	0.02mm~0.1mm (0.0008-0.0039 in)
Scanning Speed	Max. 10m/s (32.8 ft/s)
Laser Type	Fiber laser, 1×500W
Scanner	F theta lenses
Inert Gas Protection	Argon/Nitrogen
Average Inert Gas Consumption in Process	1-5 L / min
Operating System	64 bit Windows 10
Comprehensive Software	BuildStar, MakeStar®
Key Software Features	Open machine key parameters, real-time build parameter modification, three-dimensional visualization, diagnostic function, support-add function
Data File Format	STL
Power Supply	EUR/China: 220V±10%, 1~/N/PE, 50Hz, 30A US: transformer sold with machine
Operating Ambient Temperature	22-28°C (71.6-82.4°F)
Materials³	Ti6Al4V, AISi10Mg, 316L*, Maraging Steel Grade 300*, CoCrMo, CuSn10*, W*, Ta*, more materials to come

1 The functional build volume depends on the parts/materials.

2 Farsoon's Beam Shaping Technology can offer even larger layer thickness. Contact us for more details.

3 The materials marked with * are in the build process development.

Many factors may affect the performance characteristics of products. We recommend that you make tests to determine the suitability of a product for your particular purpose prior to use. Farsoon makes no warranties of any type, express or implied, including but not limited to, the warranties of merchantability or fitness for a particular use. This also applies regarding the consideration of possible intellectual property rights as well as laws and regulations. Farsoon reserves the right to change the technical data without notice. Farsoon®, Buildstar®, Makestar® are registered trademarks of Farsoon Technologies. Last Change: 2026-04

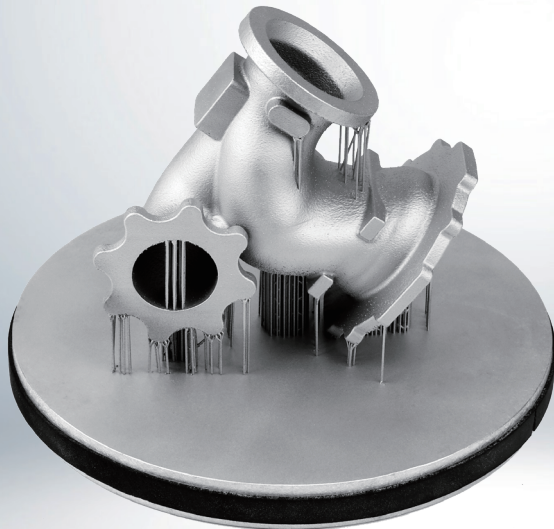

Pump (SRS & Beam Shaping Technology)
MATERIAL: AISi10Mg
SYSTEM: FS191M

www.farsoon-gl.com

AMEA Farsoon Technologies Co., Ltd. | +86.731.8397.6198 | globalinfo@farsoon.com | No. 2710 Yuelu West Boulevard, Yuelu District, Changsha, Hunan, China

AMERICAS Farsoon Americas CORP. | +1 512-551-9901 | contact@farsoonam.com | 3161 Eagles Nest Street, Suite 350, Round Rock, TX 78665

EUROPE Farsoon Europe GmbH | +49 70316325822 | wehelpyou@farsoon-eu.com | Industriestraße 5/1, 71069 Sindelfingen, Germany